





Electro-air Safety Device




New rear-slip ball sets
Optional LED Lights provide extraand efficient lighting for underneath the vehicle.
Kits No.:40103001

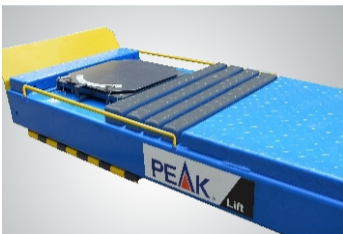

Adjustable tumpalte blocks to fit various wheel bases vehicles.



Service shelf for more effective working environments.

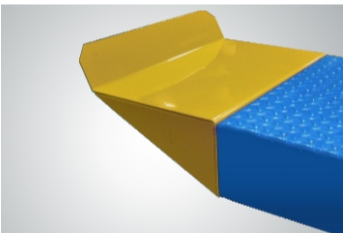

Optional extension Kits to extend the platform 300mm
Kits No.:PX002




Optional airline kits.Easy and convenient installation with all models of rolling jacks with a pneumatic pump
Kits No.:PX004

FEATURES


- 2-dual synchronous cylinders are applied to assure the lifting level on both platforms.
- Electro-air control system, safety self-lock mechanism.
- Skid proof diamond runway.
- Integrated rear slip-plates.
- Heavy duty design, the X serial scissors lifts use large steel tube to make it strong and assure the runways remain level during working.



Optional Rolling Jacks
J6H: manual hydraulic type 2.8 T
J6A: pneumatic hydraulic type 2.8 T
RJ-8A:pneumatic hydraulic type 3.5 T



Optional Tumpaltes
kits No. :40101

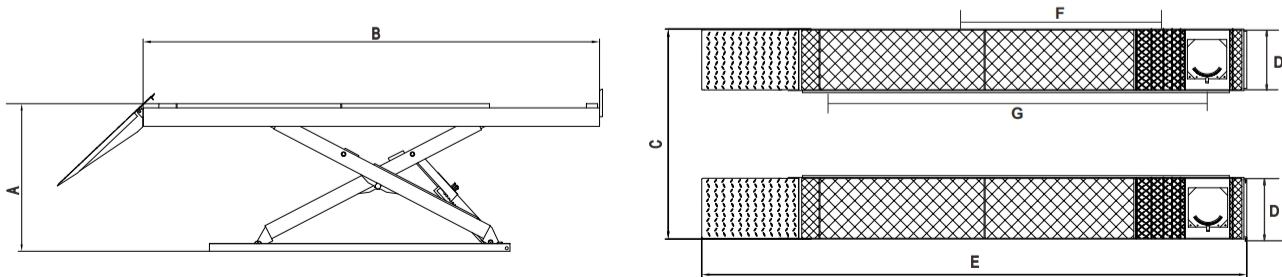

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A		B	C	D	E	F	G	Gross Weight	Motor
			Lifting Height	Minimum Height	Runway Length	Overall Width	Runway Width	Overall Length (Inc. Ramps)	Min.Four Wheel Align	Max.Four Wheel Align		
PX12A	5.5 T (12,000 lbs.)	75 Seconds	1870mm (73 5/8")	300mm (11 3/4")	5018 mm (197 1/2")	2290mm (90 1/8")	625mm (24 5/8")	6554mm (258")	2080mm (81 7/8")	4260mm (167 3/4")	2624kg (5,785 lbs)	4.0HP