


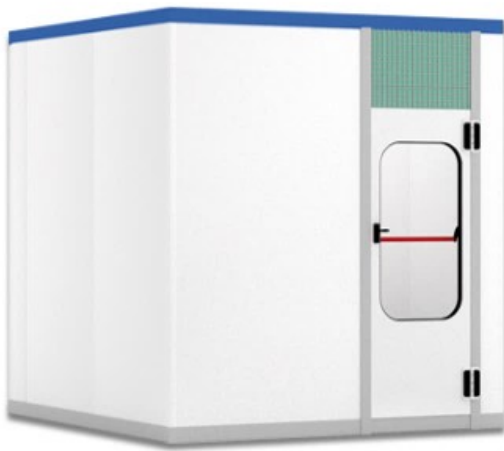

PAINT ROOM

A basic frame suitable mm 100 (h)

N° 1 access door, antipanic closing, mm 800×2.100 (h)

Lateral walls, thickness mm 40, insulated sheet panels

N°2 Lighting fixture composed by 4 fluorescent tubes of 36 Watt each equipped with electronic ballasts

Electric fan coupled by motor of Kw 0,25

Prefilter for inlet air: mm 930×470

Lights delayed 30" with respect to ventilation

	X	Y	Z
ext.	2.580	2.740	3.180-3.780-4.380
int.	2.500	2.680	3.100-3.700-4.300

